

DIALYSIS SENSOR SOLUTIONS

WHERE INNOVATION MEETS RELIABILITY, FOR BETTER PATIENT OUTCOMES.

At TE Connectivity (TE), we understand the profound responsibility that comes with designing dialysis machines - machines that are not just equipment, but lifelines for those who depend on them. We know that for the design engineers striving to create these vital systems, each decision is about more than just components and specifications; it's about creating machines that can be trusted and that help to improve patient lives.



Accuracy

By providing precise control and measurement in the dialysis processes, we empower manufacturers to deliver safer, more personalized patient care. With sensors providing as low as $\pm 0.05\%$ FS deviation, we can help confirm each dialysis treatment is fine-tuned to the specific needs of every patient.



Ease-of-Use

Knowing a sensor is only as good as its usability, our products are designed with a keen focus on ease of use. Through a variety of configurations and packages, our sensors are built to seamlessly integrate into your designs, supporting smooth operations and minimal downtime.



Low-Drift and High Durability


TE's featured dialysis sensors are built to endure the demands of daily use and deliver steadfast performance, treatment after treatment. Among the wide range of sensors, we offers options with a notably low total error band of just $\pm 1.0\%$ and minimal drift. These select sensors serve as a testament to our commitment to precision, showcasing their robust performance and enduring reliability.



Cost-Effective

We believe that high-quality healthcare should be accessible to all, and that affordability and high performance are not mutually exclusive. Our cost-effective solutions aim to ensure that cutting-edge dialysis technology can reach more patients, improving outcomes without compromising on affordability.

PERITONEAL DIALYSIS

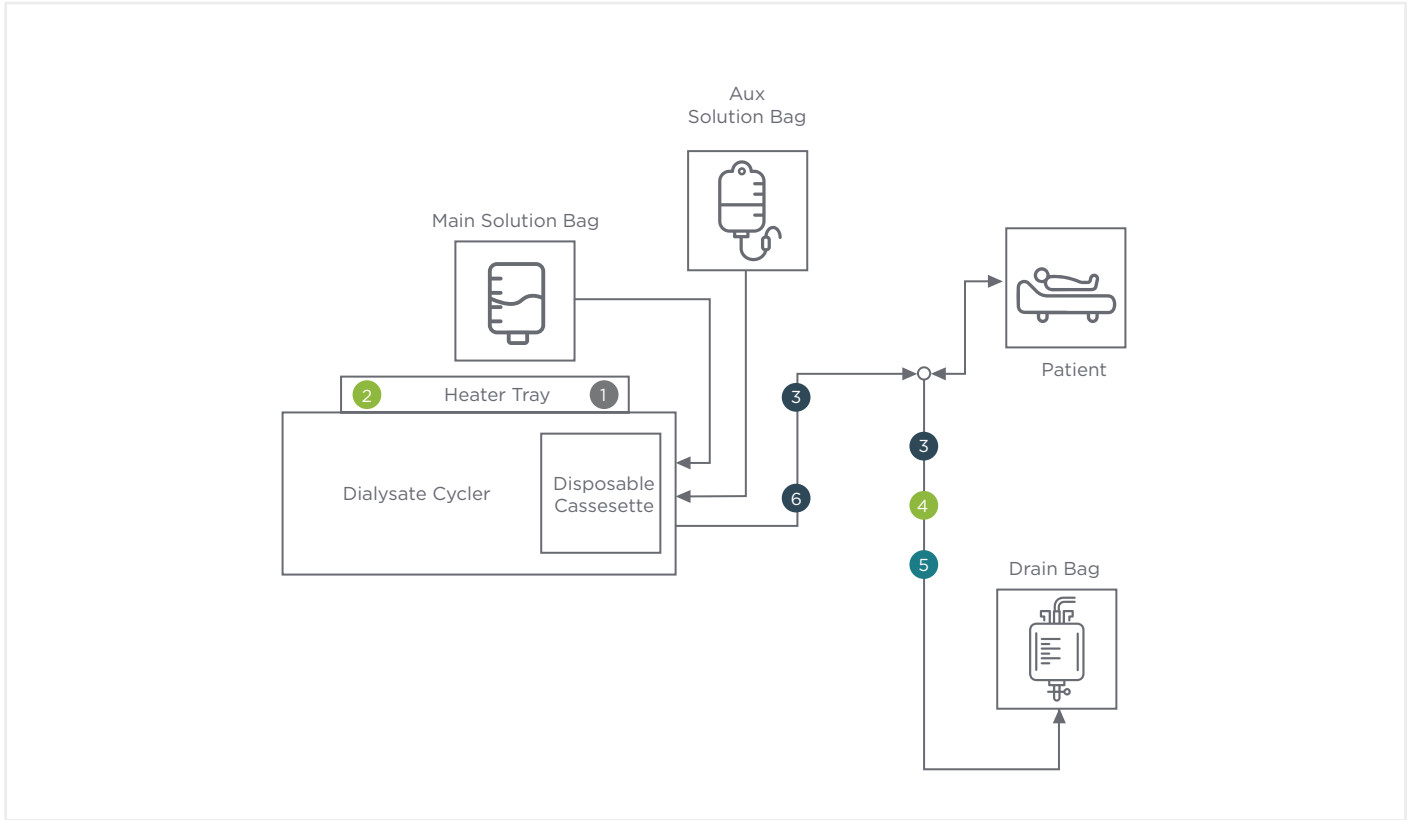

○ Optical
 ● Temperature
 ● Pressure
 ● Force

1 Optical/Force Sensor

2 Temp Sensor (SST Housing/RTD): 0° to 70° C

3 Dialysate Pressure: -400 to +600 mmHg

4 Temp Sensor (SST Housing/RTD): 0° to 70° C

5 Impedance/Conductivity Sensor

6 Non-invasive Liquid Flow: 50 to 500 mL/min





FEATURED DIALYSIS SENSORS

Dive into our carefully curated list of featured products, each one packed with unique features and advantages to transform your next dialysis device design. To fully appreciate the exceptional precision and reliability that set our sensors apart, order a free sample by simply clicking 'Order Free Samples'.

ORDER FREE SAMPLES




| Sensor Technology | Application | Key Product Features | Benefits |
|---|--|---|---|
| Ultrasonic Air Bubble Detection AD-102 |  <ul style="list-style-type: none"> Non-invasive continuous monitoring of fluid for air bubble detection with a tube | <ul style="list-style-type: none"> High sensitivity bubble detection resolution Customizable tubing sizes ranging from 3mm to 10mm, with 6mm as standard On demand and continuous self-diagnostic tests High noise immunity to EMI/RFI Non-invasive design Integrated electronics Versatile, fits various designs LED indication of wet-dry condition | <ul style="list-style-type: none"> Ensures accurate, reliable bubble detection, enhancing patient safety Offers versatility and customization for a wider range of medical applications Eliminates sterility and fluid compatibility concerns, enhancing usability Provides accurate and reliable results even in noisy environments Enhances accuracy with on-demand and continuous self-tests Eliminating false positives and saving time on unnecessary troubleshooting Adaptable design, seamless integration |
| Pressure 85BSD-F |  <ul style="list-style-type: none"> Flow rate measurement | <ul style="list-style-type: none"> Flush Mount ±0.25% Accuracy ±1.0 Total Error Band Cable/Connector Option Low Power Option I²C or SPI Interface Protocols | <ul style="list-style-type: none"> Easy installation, streamlined design Precise flow rate, optimal treatment Reliable readings, minimal errors and reliable care Flexible integration, easy maintenance and replacement Energy-efficient, eco-friendly Easy integration, efficient data transfer |
| Force Force Load Cell FS19 |  <ul style="list-style-type: none"> Occlusion detection | <ul style="list-style-type: none"> All stainless steel construction Small compression load 500G to 3000G range High sensitivity 20 mV/V Non-linearity +/-1% FS Strain gage 2200 Ω bridge Flex cable for tight space Small size High overload Low deflection Long Life Low Cost | <ul style="list-style-type: none"> Durable, corrosion-resistant and long-lasting reliability Versatile, adaptable to system requirements Accurate readings, supports precise treatment Consistent, reliable measurements and patient care High resolution, precise treatment data Fits tight spaces, less invasive and easy installation Compact design, flexible integration for a facility or at-home devices Tolerates high loads, robust, promotes uninterrupted treatment Minimal displacement, accurate readings for optimal care Durable, reduces replacement frequency and treatment disruptions Affordable, high value for cost |
| Force Force Load Cell FS20 |  <ul style="list-style-type: none"> Occlusion detection | <ul style="list-style-type: none"> Small Size, Low Noise Robust, High Reliability High Over-Range Capability Low Deflection Essentially Unlimited Cycle Life Expectancy Low Off Center Errors Fast Response Time Industry Standard Packaging 500 to 5000 Grams-Force Range Reverse Polarity Protected | <ul style="list-style-type: none"> Compact, quiet operation, patient comfort Consistent performance, dependable patient care Accurate under high loads, precise treatment Minimal displacement, accurate readings Long-lasting, uninterrupted patient care Enhanced accuracy, reliable treatment Prompt adjustments, real-time care Easy integration, consistent quality Versatile, adaptable to patient needs Safe operation, protects patient care |
| Force Force Load Cell FX29 |  <ul style="list-style-type: none"> Occlusion detection | <ul style="list-style-type: none"> Compact Design mV, Amplified Analog and Digital Outputs Optional I²C Digital Interface Exceptional Value Robust Construction High Over Range Capability | <ul style="list-style-type: none"> Space-saving, flexible in medical settings Versatile outputs, optimal control Easy integration, efficient data transfer Affordable, enhances patient accessibility Durable, reliable for patient care Handles high loads, precise, safe treatment |

| Sensor Technology | Application | Key Product Features | Benefits |
|---|---|---|--|
| Temperature PT1000  | <ul style="list-style-type: none"> Monitor and control of temperature of infusion liquids | <ul style="list-style-type: none"> Complies with DIN EN 60751 Wide operating temperature range: -50°C to +600°C Standard base resistance at 0°C: 1000Ω Class F 0.1 (T = AA), F 0.15 (A), F 0.3 (B) and F0.6 (C) options Variety of standard outline dimensions available to fit a wide range of space requirements Global interchangeability | <ul style="list-style-type: none"> Adheres to quality standards, reliable performance Versatile, adaptable to conditions Consistent readings, accurate temperature control Various accuracy options, precise calibration and design flexibility Seamless integration, design flexibility Simplified replacement, lowers downtime, consistent performance |
| Temperature Discrete NTC Series 1  | <ul style="list-style-type: none"> Monitor and control of temperature of infusion liquids | <ul style="list-style-type: none"> Interchangeability Proven stability and reliability Rapid time response Alloy lead wires for reduced thermal conductivity ("stem effect") Thermally conductive epoxy coating Temperature range -40°C to +125°C Custom probe assemblies available Ø 2.4 mm Maximum Diameter 32 AWG Alloy 180 Leads Four Temperature Tolerance Classifications Available RoHS Compliant | <ul style="list-style-type: none"> Easy sensor replacement, less downtime Consistent performance for trusted care Real-time monitoring, responsive treatments Reduced thermal conductivity, enhances accuracy Improves temperature response, precise readings Accurate measurements under various conditions Design flexibility, easy design integration Fits compact spaces, flexible design Reliable connections, durable performance Options for precision requirements Adheres to safety standards, environmentally safe, sustainable design |
| Ultrasonic LL01  | <ul style="list-style-type: none"> Monitor Dialysate Level and help Control Fluid Delivery | <ul style="list-style-type: none"> High pressure up to 250 PSIG (1724 Kpa) No moving parts, easy to install Input 5 to 30 VDC Filter techniques enhance performance 3.3 volt input power Electropolishing Higher pressure up to 500 PSIG (3447 Kpa) Relay output, 0.5 amp SPST - NO or NC | <ul style="list-style-type: none"> Tolerates high system pressures. Enhances durability, simplifies assembly. Broad input range, design flexibility. Reduces noise, increases measurement reliability. Compatible with low voltage designs. Improves contamination resistance. Improved design flexibility and range of applications. Easy interface, design flexibility for control tasks. |
| Board-Mount Pressure Sensor HCE/HDI Series  | <ul style="list-style-type: none"> Monitor and control the pressure of the dialysis fluid and blood flow | <ul style="list-style-type: none"> Pressure ranges from 10 mbar to 5 bar, absolute, gage or differential pressure ±0.5% Full-Scale Accuracy mmHg pressure ranges available Digital SPI bus and analog output (HCE) Digital I²C bus and analog output (HDI) Precision ASIC signal conditioning Calibrated and temperature compensated Miniature SMD housings (HCE) SMT and DIP housings (HDI) | <ul style="list-style-type: none"> Enables design flexibility, safety, and supports optimal pressure Enhances dialysis effectiveness with precise measurements Offers application-specific calibrations Allows versatile integration and reliable readings Simplifies sensor integration, boosts reliability, and supports varied designs Improves efficiency and safety via accurate signals Saves time, ensures consistent operation, temperature-independent Supports compact designs requirements for user convenience Provides flexible sensor mounting, contributing to compactness and user-friendliness |

VITAL SIGNS MONITORING SENSORS

Imagine a world where dialysis is not just treatment, but an opportunity for unparalleled patient care. If you're looking to stand apart from the competition and amplify the functionality of your designs, consider TE's Vital Sign Monitoring Sensors portfolio. Embrace innovation with seamless integration, real-time patient data and enhanced safety measures.

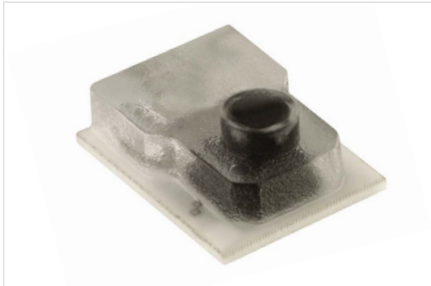

Blood Pressure Sensor



Body Temperature Sensor



Blood Oxygen Sensor

Are you confronted with a design dilemma or just seeking more detailed information? Our seasoned technical experts are only a click away. Click 'Connect with an Expert' to schedule a meeting. Access an invaluable reservoir of knowledge and experience and let us help you make the most informed decision for your project. Together, let's redefine the future of dialysis care.

CONNECT WITH AN EXPERT 

te.com/DialysisSensors

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

©2024 TE Connectivity. All Rights Reserved.

04/24 Original